

BC 210 AC





PURCHASE CODES

BC 210 single phase without thermo switch	3RBC210
BC 210 single phase with thermo switch	3RBC210T247 3RBC210T260
BC 210 three phase without thermo switch	3RBC21038
BC 210 three phase with thermo switch	3RBC21038T247 3RBC21038T260


SPARE PARTS

Cooling element	1RO03378
Frame	3CNBC210M/T.1
Electric fan for BC 210 single phase	1VNA2E200.1
Electric fan for BC 210 three phase	1VNA2D200
Thermo-switch 47-36 IP 65	1TRM 47-36
Thermo-switch 60-49 IP 65	1TRM 60-49

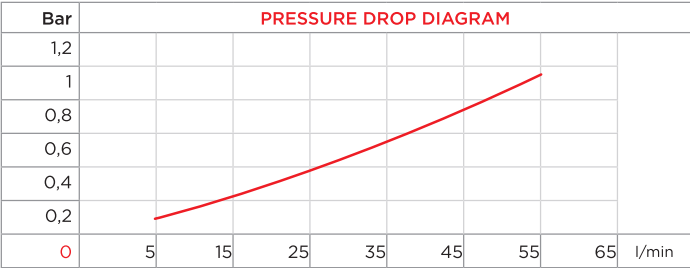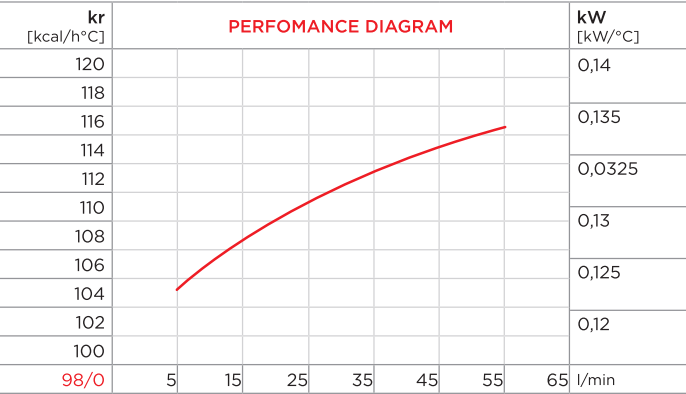


CORRECTION FACTOR

cSt	22	30	46	68	100	150	220
f	0,6	1	1,5	2,3	3,5	5	7

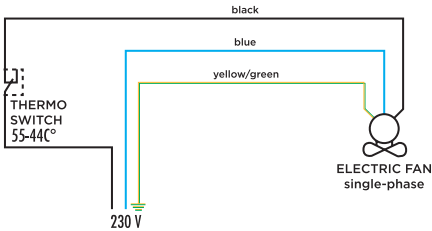

- Dimensions and technical characteristics are not binding

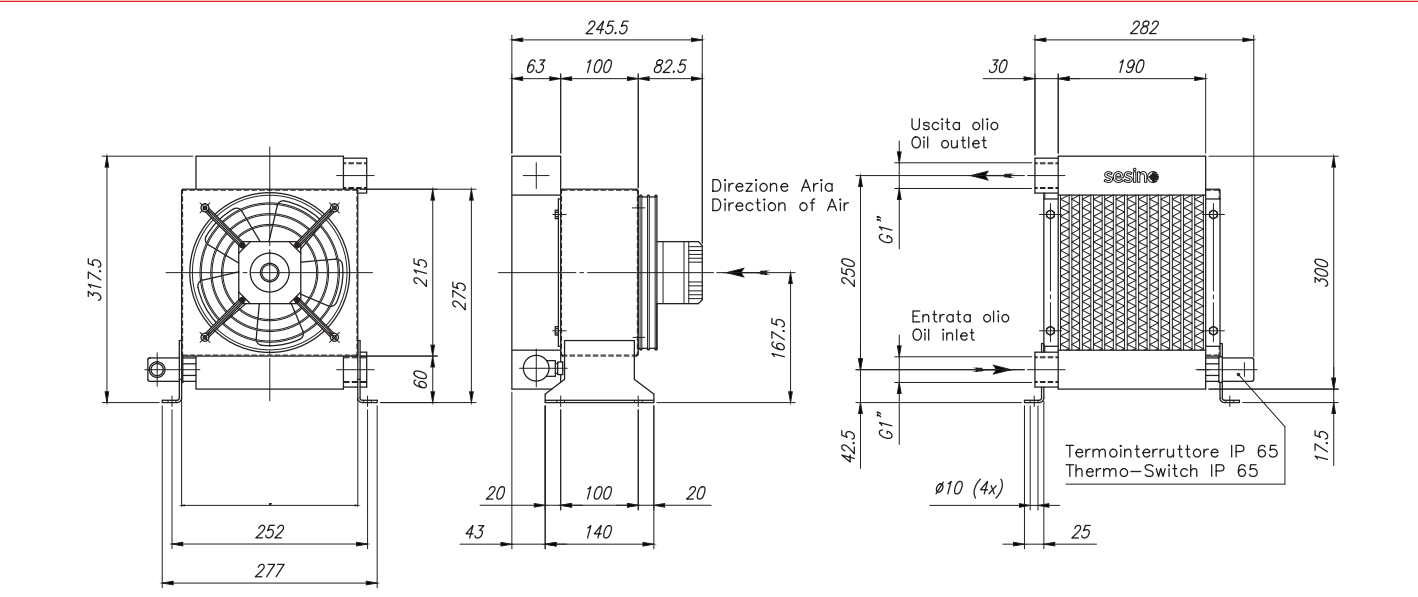

OIL FLOW	VOLTAGE	FREQUENCY	POWER	CURRENT	AIR FLOW	PROTECTION	NOISE LEVEL	WEIGHT	ø FAN
l/min	V	hz	W	A	m³/h	IP	dB(A)	kg	mm
10-80	230/240	50/60	18/62	0,27	630	54	55	6	200
10-80	400	50/60	68/70	0,17/0,13	630	54	55	6	200

BC 250 AC





PURCHASE CODES

BC 250 single phase without thermo switch	3RBC250
BC 250 single phase with thermo switch	3RBC250T247 3RBC250T260
BC 250 three phase without thermo switch	3RBC25038
BC 250 three phase with thermo switch	3RBC25038T247 3RBC25038T260


SPARE PARTS

Cooling element	1RO03379
Frame	3CNBC250M/T.1
Electric fan for BC 250 single phase	1VNA2E250G
Electric fan for BC 250 three phase	1VNA2D250.2
Thermo-switch 47-36 IP 65	1TRM 47-36
Thermo-switch 60-49 IP 65	1TRM 60-49

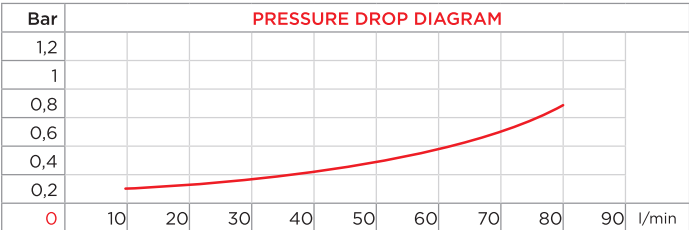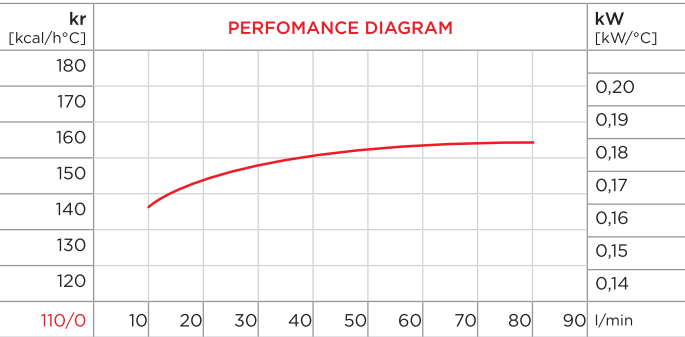


CORRECTION FACTOR

cSt	22	30	46	68	100	150	220
f	0,6	1	1,5	2,3	3,5	5	7

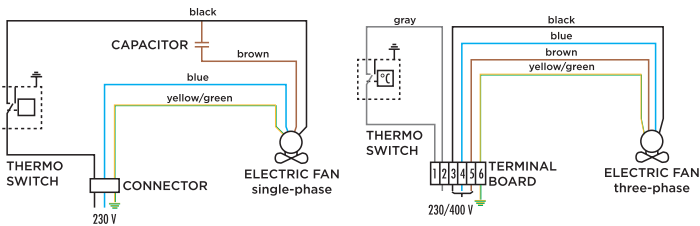

- Dimensions and technical characteristics are not binding

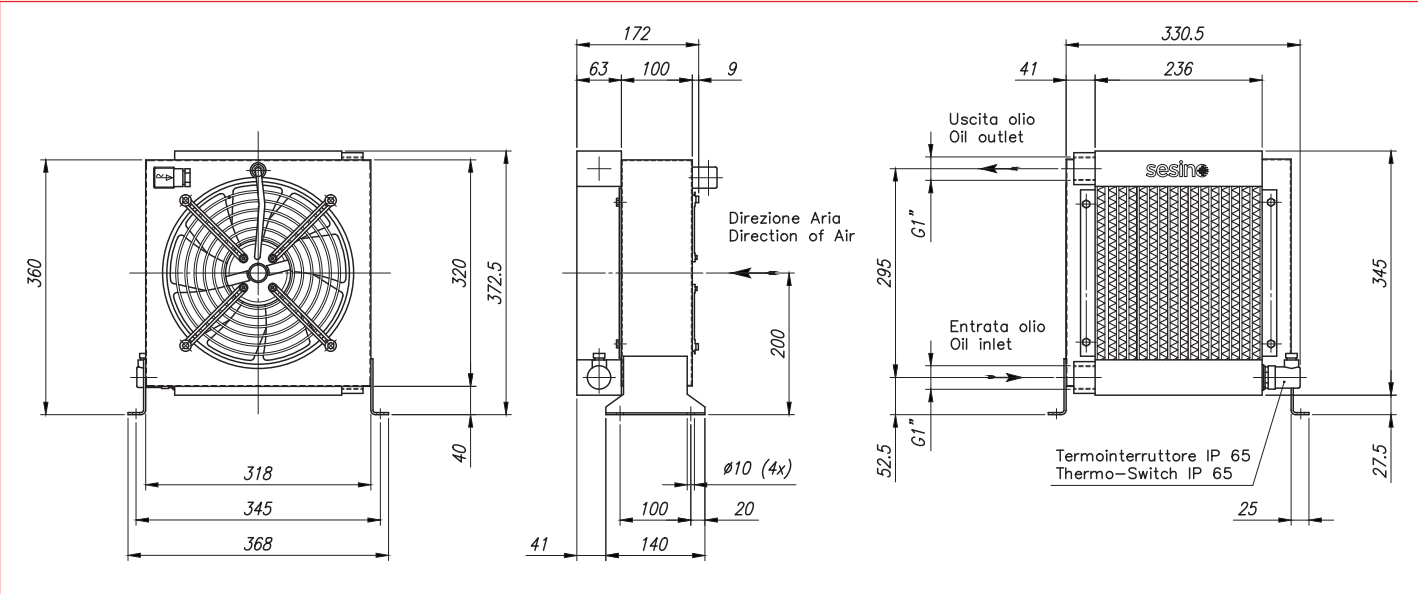

OIL FLOW	VOLTAGE	FREQUENCY	POWER	CURRENT	AIR FLOW	PROTECTION	NOISE LEVEL	WEIGHT	ø FAN
l/min	V	hz	W	A	m³/h	IP	dB(A)	kg	mm
20-150	230	50/60	115/150	0,51/0,66	910	54	74	13	250
20-150	400	50/60	100/140	0,20/0,23	950	54	73	13	250

BC 250 AC BY-PASS




PURCHASE CODES

BC 250 single phase without thermo switch	3RBC250BP
BC 250 single phase with thermo switch	3RBC250T247BP 3RBC250T260BP
BC 250 three phase without thermo switch	3RBC25038BP
BC 250 three phase with thermo switch	3RBC25038T247BP 3RBC25038T260BP



SPARE PARTS

Cooling element	1RO03379BP
Frame	3CNBC250M/T.1
Electric fan for BC 250 single phase	1VNA2E250G
Electric fan for BC 250 three phase	1VNA2D250.2
Thermo-switch 47-36 IP 65	1TRM 47-36
Thermo-switch 60-49 IP 65	1TRM 60-49
By-pass	9FTBC

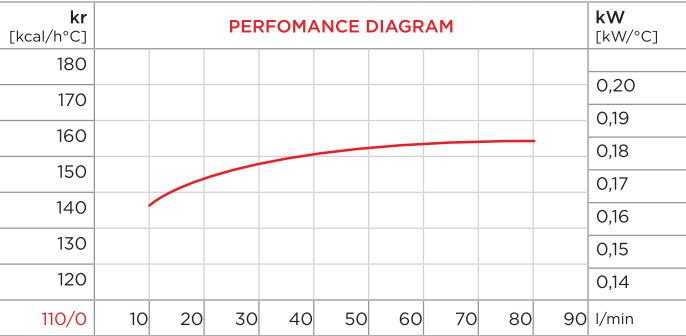


CORRECTION FACTOR

cSt	22	30	46	68	100	150	220
f	0,6	1	1,5	2,3	3,5	5	7

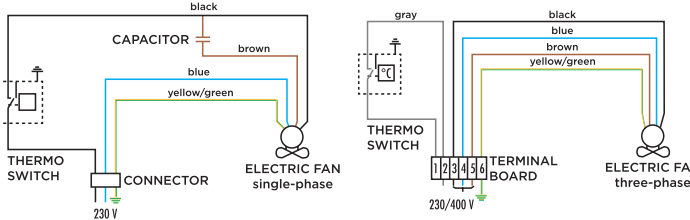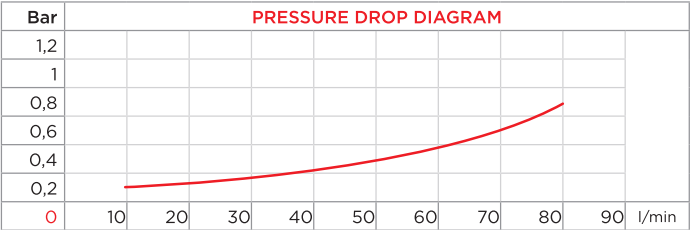

- Dimensions and technical characteristics are not binding

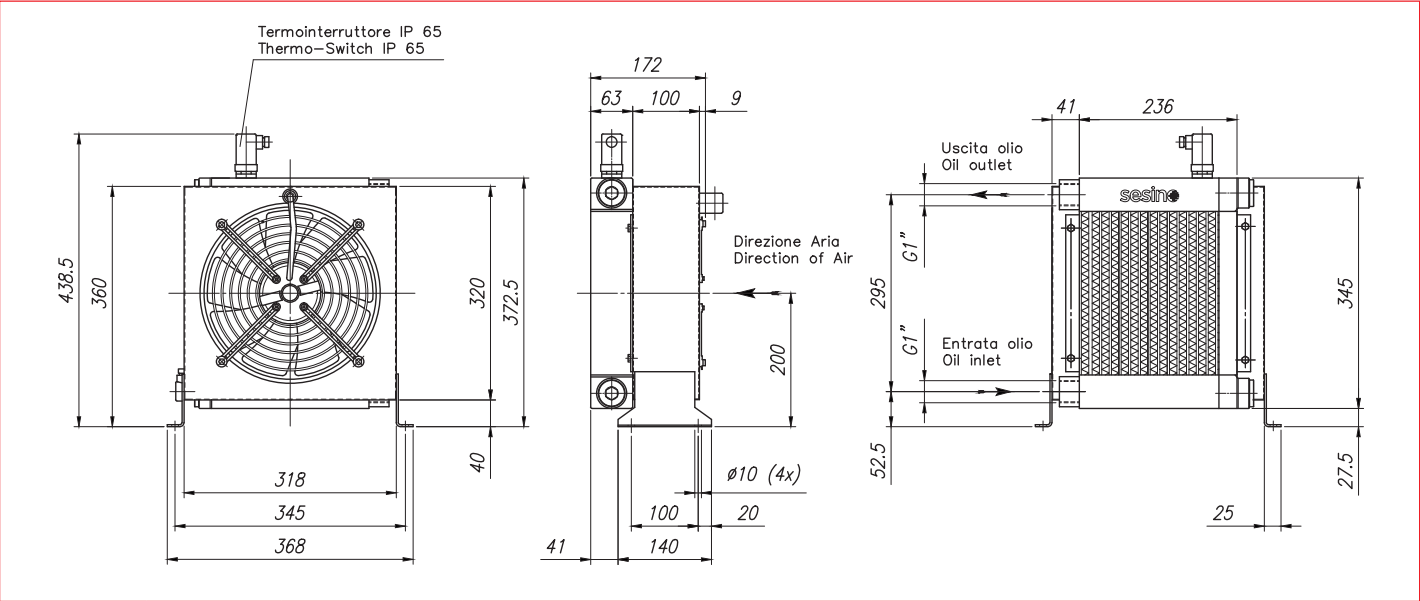

OIL FLOW	VOLTAGE	FREQUENCY	POWER	CURRENT	AIR FLOW	PROTECTION	NOISE LEVEL	WEIGHT	ø FAN
l/min	V	hz	W	A	m³/h	IP	dB(A)	kg	mm
20-150	230	50/60	115/150	0,51/0,66	910	54	74	13	250
20-150	400	50/60	100/140	0,20/0,23	950	54	73	13	250

BC 250/2 AC





PURCHASE CODES


BC 250/2 single phase without thermo switch	3RBC250/2
BC 250/2 single phase with thermo switch	3RBC250/2T247 3RBC250/2T260
BC 250/2 three phase without thermo switch	3RBC250/238
BC 250/2 three phase with thermo switch	3RBC250/238T247 3RBC250/238T260

SPARE PARTS


Cooling element	1RO03380
Frame	3CNBC250/2M/T.1
Electric fan for BC 250/2 single phase	1VNA2E250G
Electric fan for BC 250/2 three phase	1VNA2D250.2
Thermo-switch 47-36 IP 65	1TRM 47-36
Thermo-switch 60-49 IP 65	1TRM 60-49

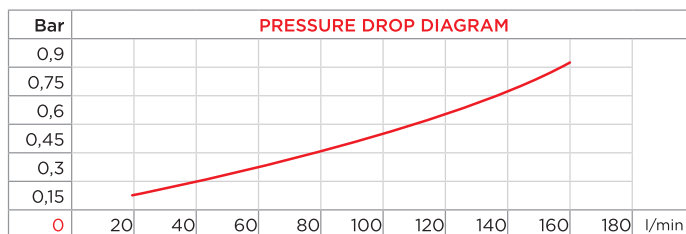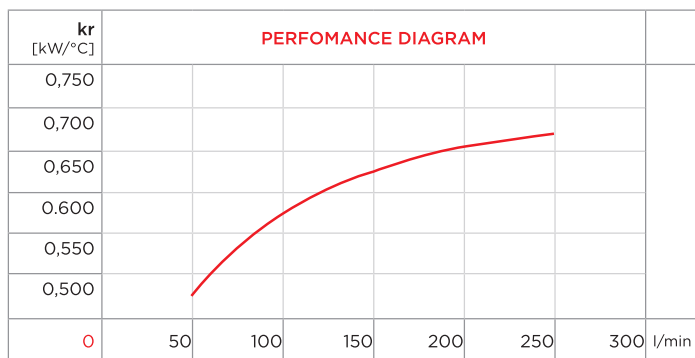

CORRECTION FACTOR							
cSt	22	30	46	68	100	150	220
f	0,6	1	1,5	2,3	3,5	5	7

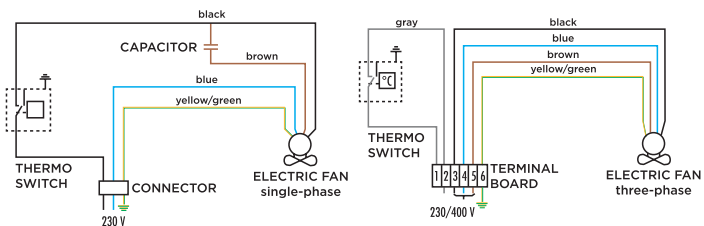

- Dimensions and technical characteristics are not binding

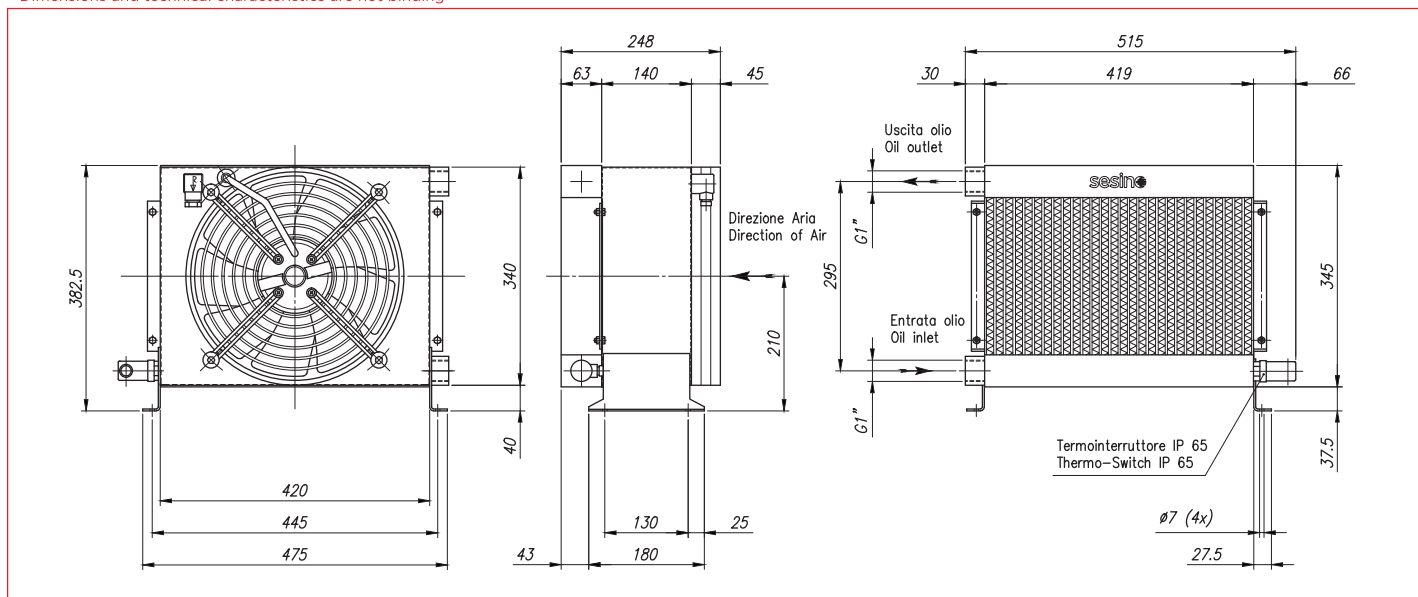

OIL FLOW	VOLTAGE	FREQUENCY	POWER	CURRENT	AIR FLOW	PROTECTION	NOISE LEVEL	WEIGHT	ø FAN
l/min	V	hz	W	A	m³/h	IP	dB(A)	kg	mm
30-180	230	50/60	115/150	0,51/0,66	1.300	54	75	17	250
30-180	400	50/60	100/140	0,20/0,23	1.300	54	73	12	250

BC 250/2 AC BY-PASS






PURCHASE CODES


BC 250/2 single phase without thermo switch	3RBC250/2BP
BC 250/2 single phase with thermo switch	3RBC250/2T247BP 3RBC250/2T260BP
BC 250/2 three phase without thermo switch	3RBC250/238BP
BC 250/2 three phase with thermo switch	3RBC250/238T247BP 3RBC250/238T260BP

SPARE PARTS

Cooling element	1RO03380BP
Frame	3CNBC250/2M/T.1
Electric fan for BC 250/2 single phase	1VNA2E250G
Electric fan for BC 250/2 three phase	1VNA2D250.2
Thermo-switch 47-36 IP 65	1TRM 47-36
Thermo-switch 60-49 IP 65	1TRM 60-49
By-pass	9FTBC

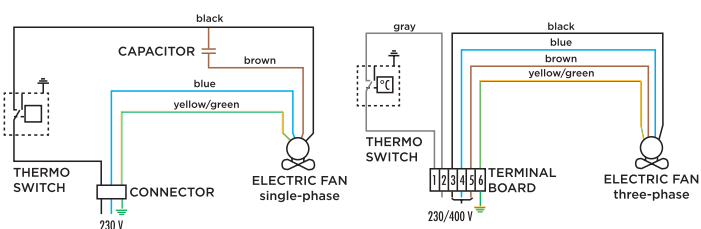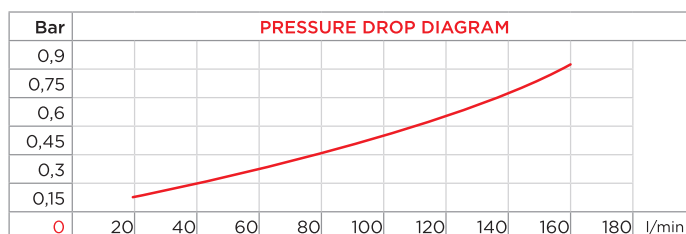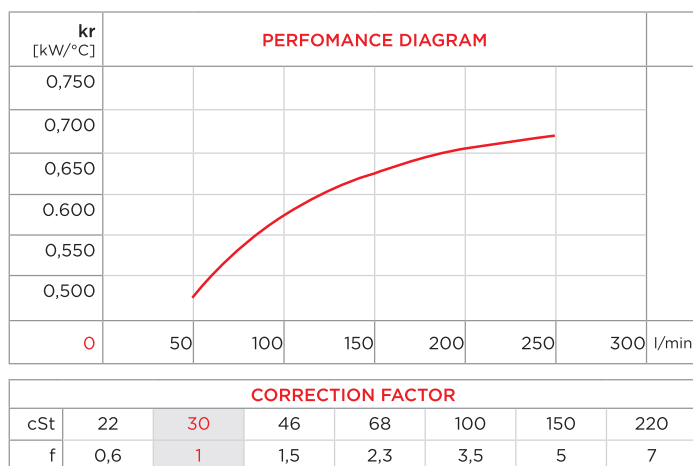

- Dimensions and technical characteristics are not binding

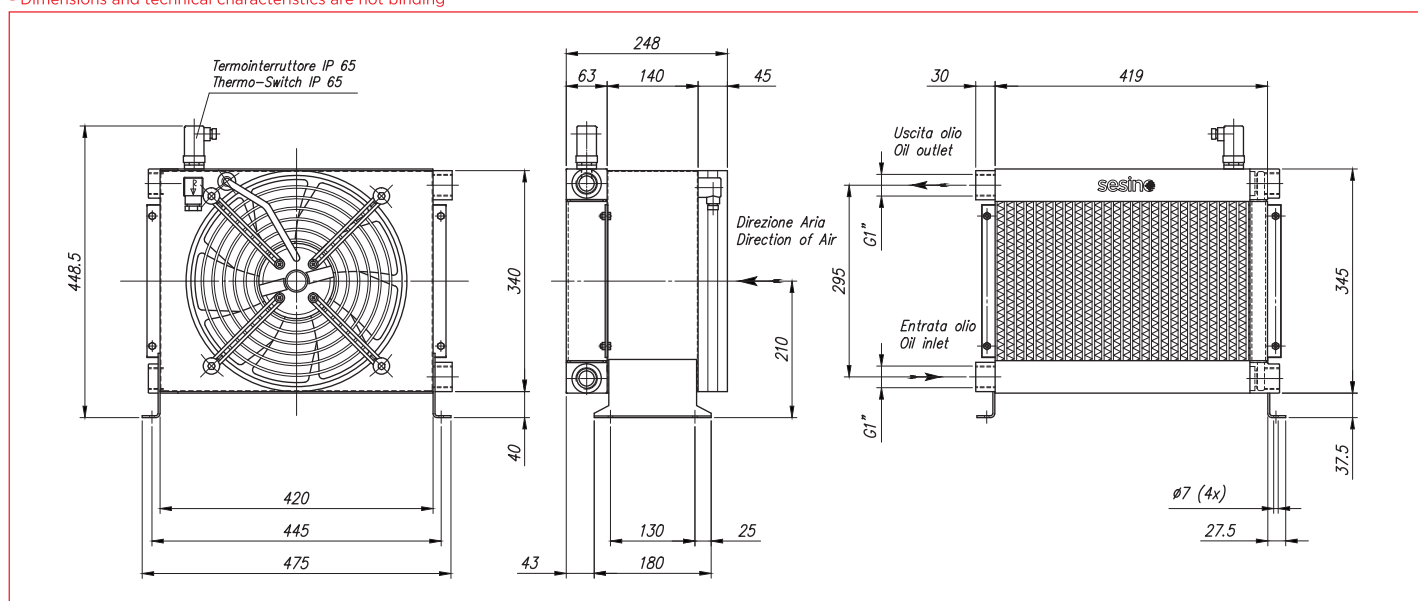

OIL FLOW	VOLTAGE	FREQUENCY	POWER	CURRENT	AIR FLOW	PROTECTION	NOISE LEVEL	WEIGHT	Ø FAN
l/min	V	hz	W	A	m³/h	IP	dB(A)	kg	mm
30-180	230	50/60	115/150	0,51/0,66	1.300	54	75	17	250
30-180	400	50/60	100/140	0,20/0,23	1.300	54	73	17	250

BC 390 AC






PURCHASE CODES


BC 390 single phase without thermo switch	3RBC390
BC 390 single phase with thermo switch	3RBC390T247 3RBC390T260
BC 390 three phase without thermo switch	3RBC39038
BC 390 three phase with thermo switch	3RBC39038T247 3RBC39038T260

SPARE PARTS

Cooling element	1RO03381
Frame	3CNBC390M/T.1
Electric fan for BC 250 single phase	1VNA4E350
Electric fan for BC 250 three phase	1VNELCO43038DV1
Thermo-switch 47-36 IP 65	1TRM 47-36
Thermo-switch 60-49 IP 65	1TRM 60-49

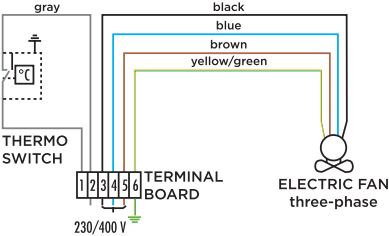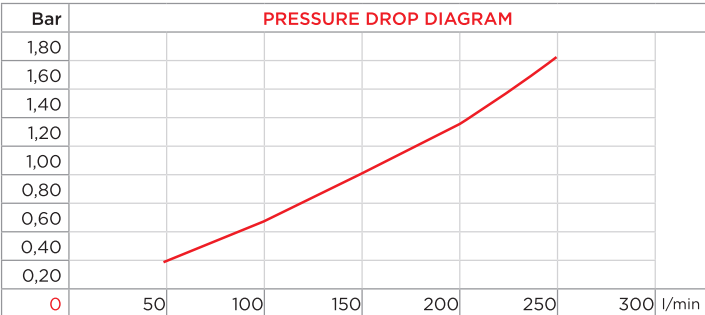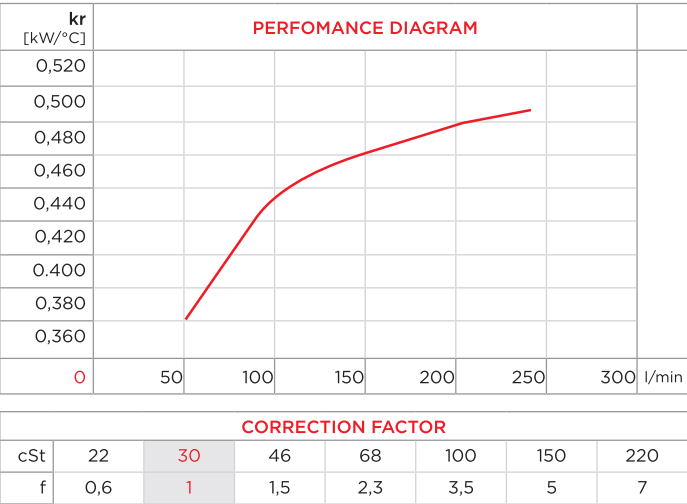

- Dimensions and technical characteristics are not binding

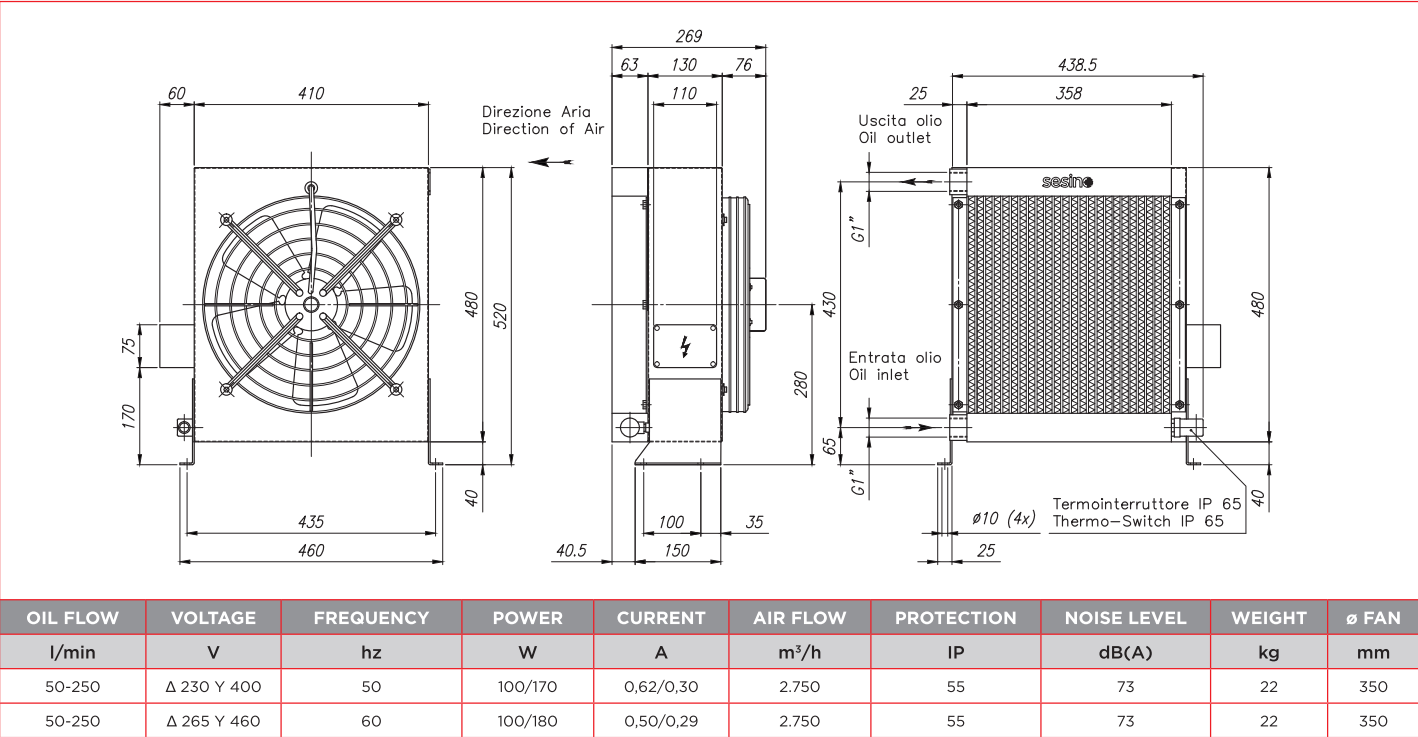

BC 390 AC BY-PASS






PURCHASE CODES


BC 390 single phase without thermo switch	3RBC390BP
BC 390 single phase with thermo switch	3RBC390T247BP 3RBC390T260BP
BC 390 three phase without thermo switch	3RBC39038BP
BC 390 three phase with thermo switch	3RBC39038T247BP 3RBC39038T260BP

SPARE PARTS

Cooling element	1RO03381BP
Frame	3CNBC390M/T.1
Electric fan for BC 390 single phase	1VNA4E350
Electric fan for BC 390 three phase	1VNELCO43038DV1
Thermo-switch 47-36 IP 65	1TRM 47-36
Thermo-switch 60-49 IP 65	1TRM 60-49
By-pass	9FTBC

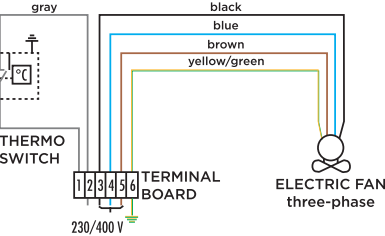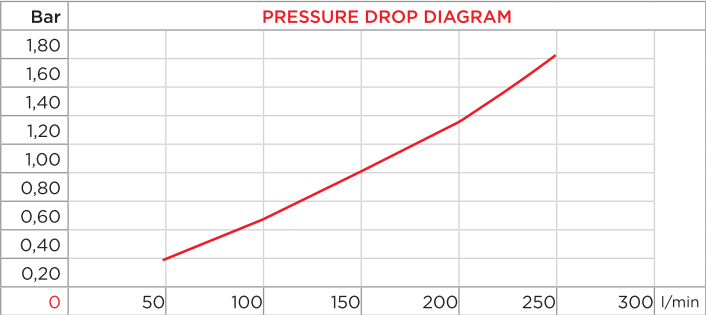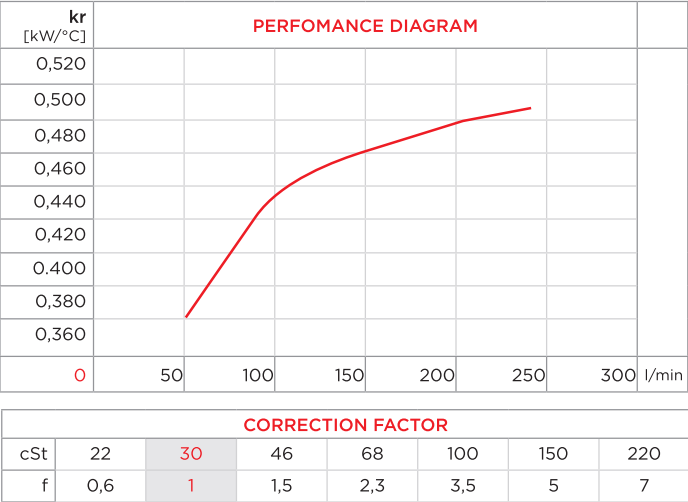

- Dimensions and technical characteristics are not binding

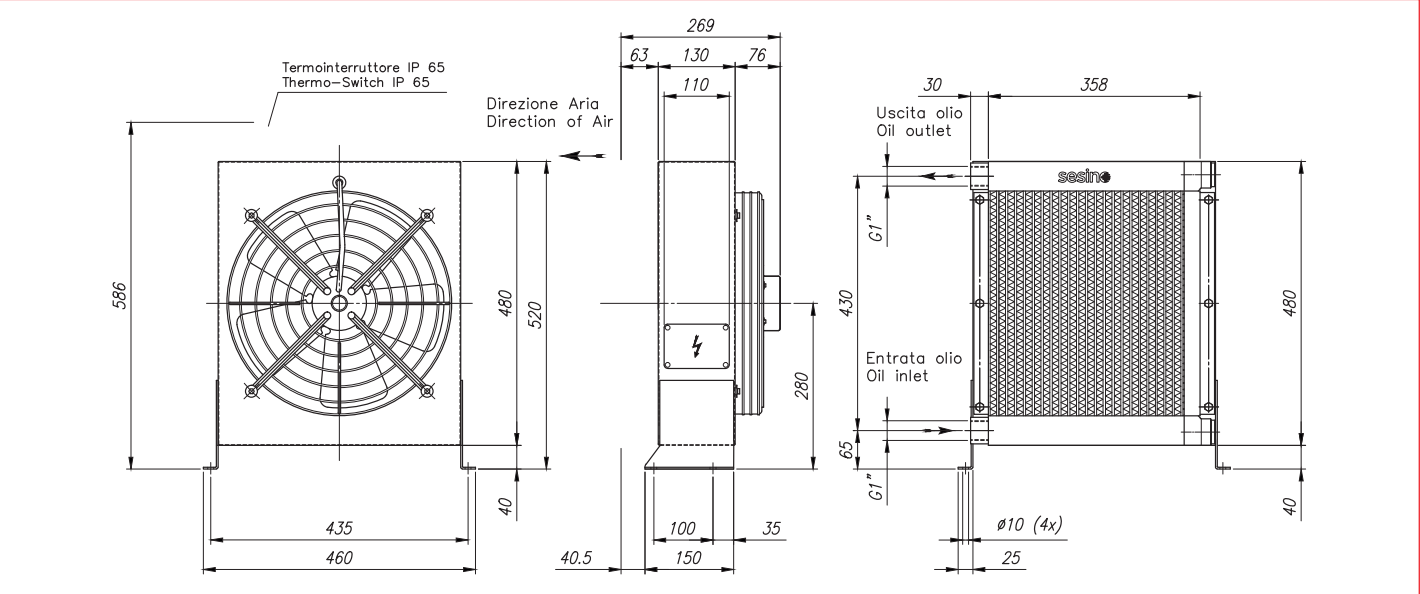

OIL FLOW	VOLTAGE	FREQUENCY	POWER	CURRENT	AIR FLOW	PROTECTION	NOISE LEVEL	WEIGHT	ø FAN
l/min	V	hz	W	A	m³/h	IP	dB(A)	kg	mm
50-250	Δ 230 Y 400	50	100/170	0,62/0,30	2.750	55	73	22	350
50-250	Δ 265 Y 460	60	100/180	0,50/0,29	2.750	55	73	22	350

BC 390/2 AC





PURCHASE CODES

BC 390/2 single phase without thermo switch	3RBC390/2
BC 390/2 single phase with thermo switch	3RBC390/2T247 3RBC390/2T260
BC 390/2 three phase without thermo switch	3RBC390/238
BC 390/2 three phase with thermo switch	3RBC390/238T247 3RBC390/238T260


SPARE PARTS

Cooling element	1RO03383
Frame	3CNBC390/2M/T.1
Electric fan for BC 250 single phase	1VNEASS400
Electric fan for BC 250 three phase	1VNELCO43238DV2
Thermo-switch 47-36 IP 65	1TRM 47-36
Thermo-switch 60-49 IP 65	1TRM 60-49

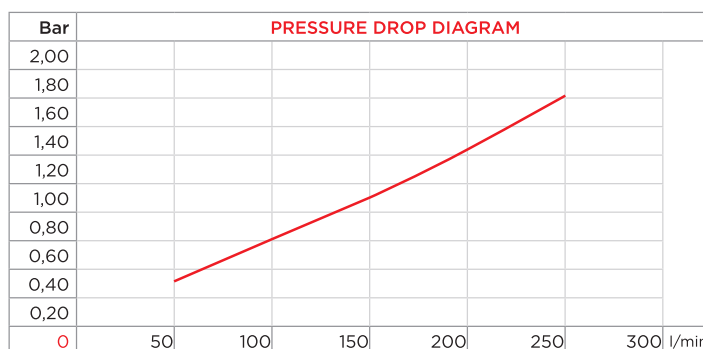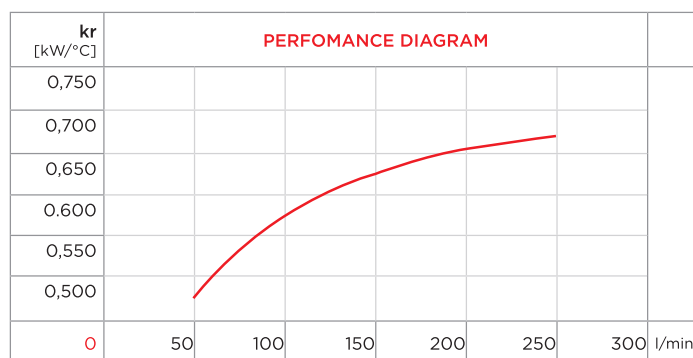


CORRECTION FACTOR

cSt	22	30	46	68	100	150	220
f	0,6	1	1,5	2,3	3,5	5	7

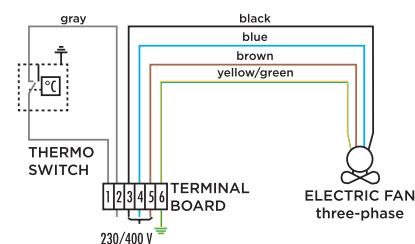

- Dimensions and technical characteristics are not binding

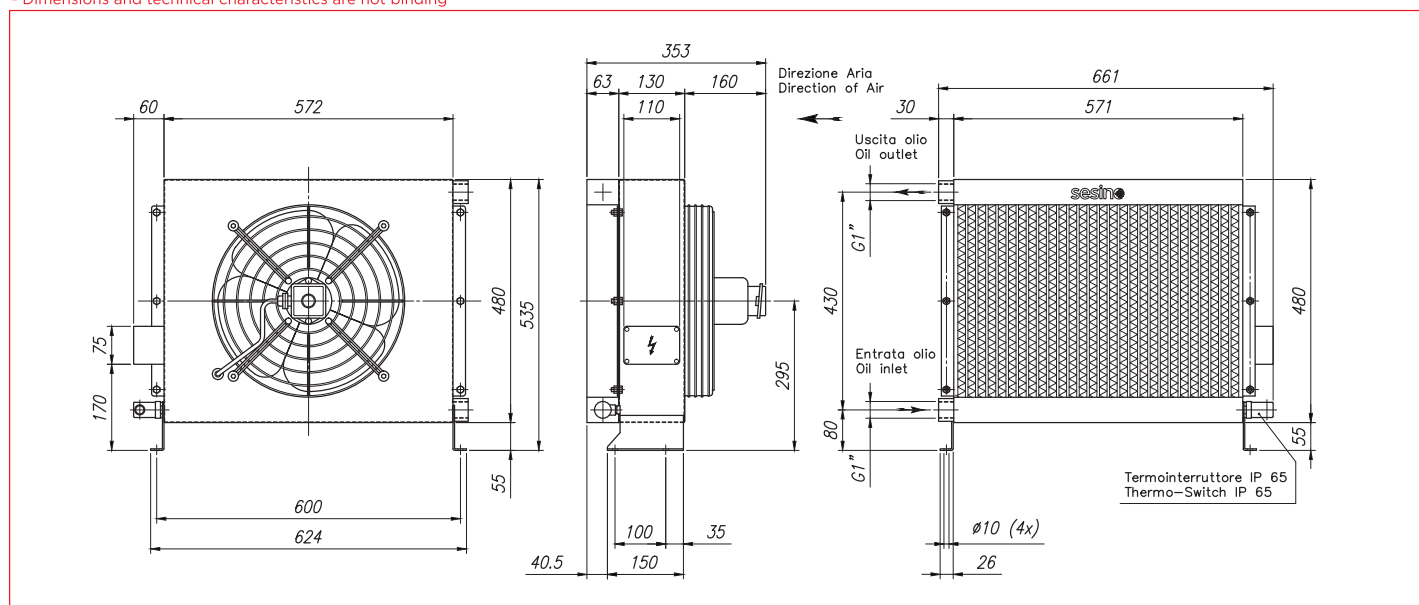

OIL FLOW	VOLTAGE	FREQUENCY	POWER	CURRENT	AIR FLOW	PROTECTION	NOISE LEVEL	WEIGHT	ø FAN
l/min	V	hz	W	A	m³/h	IP	dB(A)	kg	mm
50-250	Δ 230 Y 400	50	110/180	0,57/0,33	2.750	55	72	31	400
50-250	Δ 265 Y 460	60	145/260	0,68/0,39	3.300	55	73	31	400

BC 390/2 AC BY-PASS





PURCHASE CODES

BC 390/2 single phase without thermo switch	3RBC390/2BP
BC 390/2 single phase with thermo switch	3RBC390/2T247BP 3RBC390/2T260BP
BC 390/2 three phase without thermo switch	3RBC390/238BP
BC 390/2 three phase with thermo switch	3RBC390/238T247BP 3RBC390/238T260BP


SPARE PARTS

Cooling element	1RO03383BP
Frame	3CNBC390/2M/T.1
Electric fan for BC 390/2 single phase	1VNEASS400
Electric fan for BC 390/2 three phase	1VNELCO43238DV2
Thermo-switch 47-36 IP 65	1TRM 47-36
Thermo-switch 60-49 IP 65	1TRM 60-49
By-pass	9FTBC

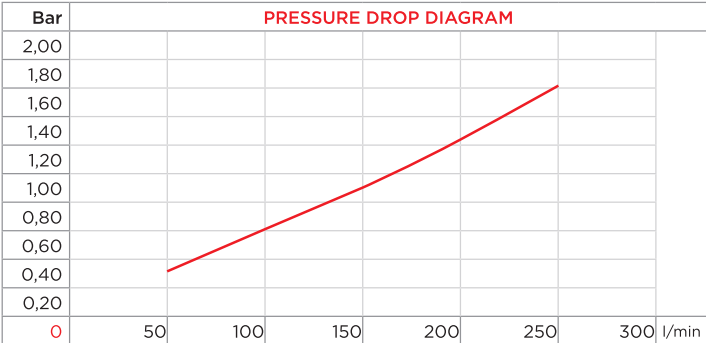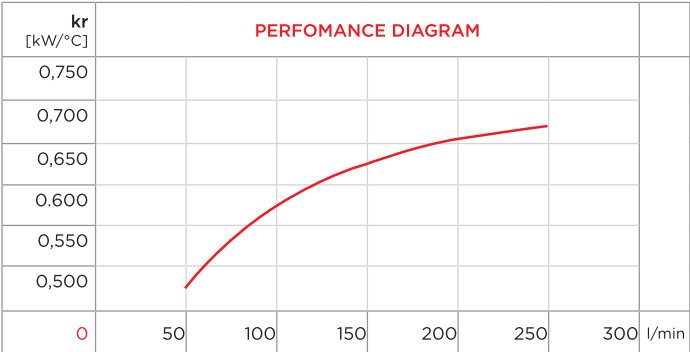


CORRECTION FACTOR

cSt	22	30	46	68	100	150	220
f	0,6	1	1,5	2,3	3,5	5	7

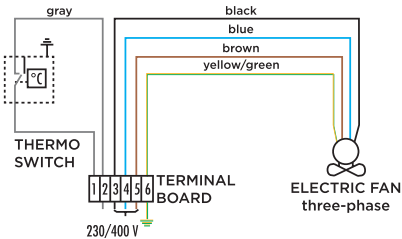

- Dimensions and technical characteristics are not binding

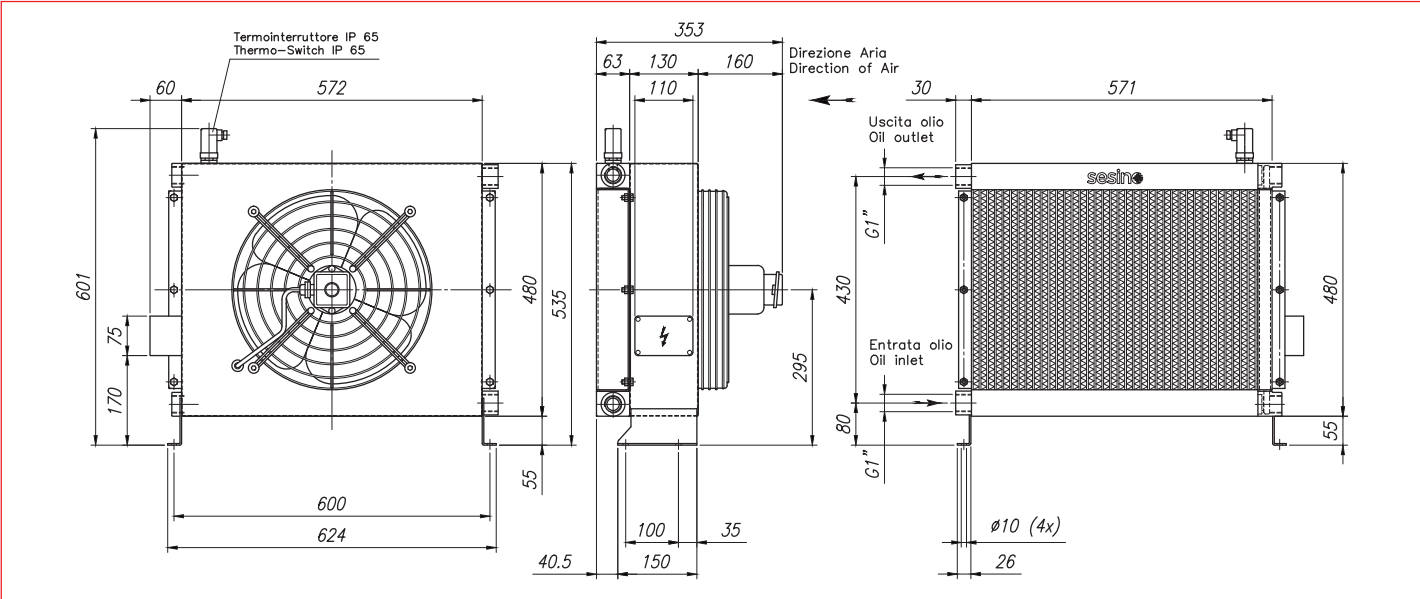

OIL FLOW	VOLTAGE	FREQUENCY	POWER	CURRENT	AIR FLOW	PROTECTION	NOISE LEVEL	WEIGHT	ø FAN
l/min	V	hz	W	A	m³/h	IP	dB(A)	kg	mm
50-250	Δ 230 Y 400	50	110/180	0,57/0,33	2.750	55	72	31	400
50-250	Δ 265 Y 460	60	145/260	0,68/0,39	3.300	55	73	31	400

BC 390/3 AC BY-PASS





PURCHASE CODES

BC 390/3 single phase without thermo switch	3RBC390/3BP
BC 390/3 single phase with thermo switch	3RBC390/3T247BP 3RBC390/3T260BP
BC 390/3 three phase without thermo switch	3RBC390/338BP
BC 390/3 three phase with thermo switch	3RBC390/338T247BP 3RBC390/338T260BP


SPARE PARTS

Cooling element	1RO14494BP
Frame	3CNBC390/3M/T.1
Electric fan for BC 390/2 single phase	1VNEASS400
Electric fan for BC 390/2 three phase	1VNELCO43238DV2
Thermo-switch 47-36 IP 65	1TRM 47-36
Thermo-switch 60-49 IP 65	1TRM 60-49
By-pass	9FTBC

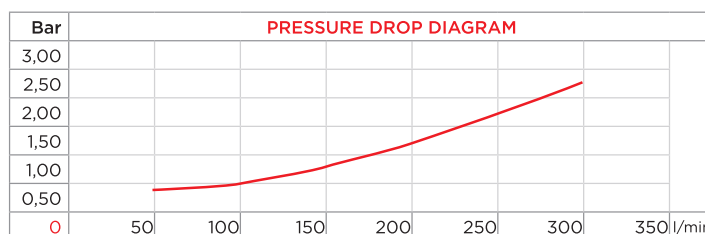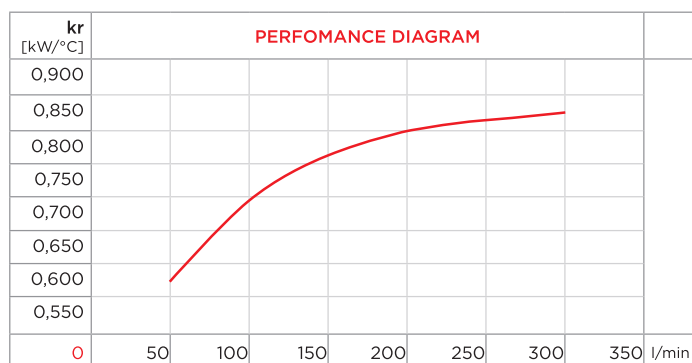


CORRECTION FACTOR

cSt	22	30	46	68	100	150	220
f	0,6	1	1,5	2,3	3,5	5	7

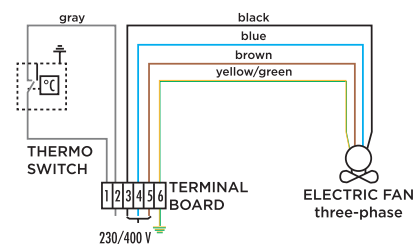

- Dimensions and technical characteristics are not binding

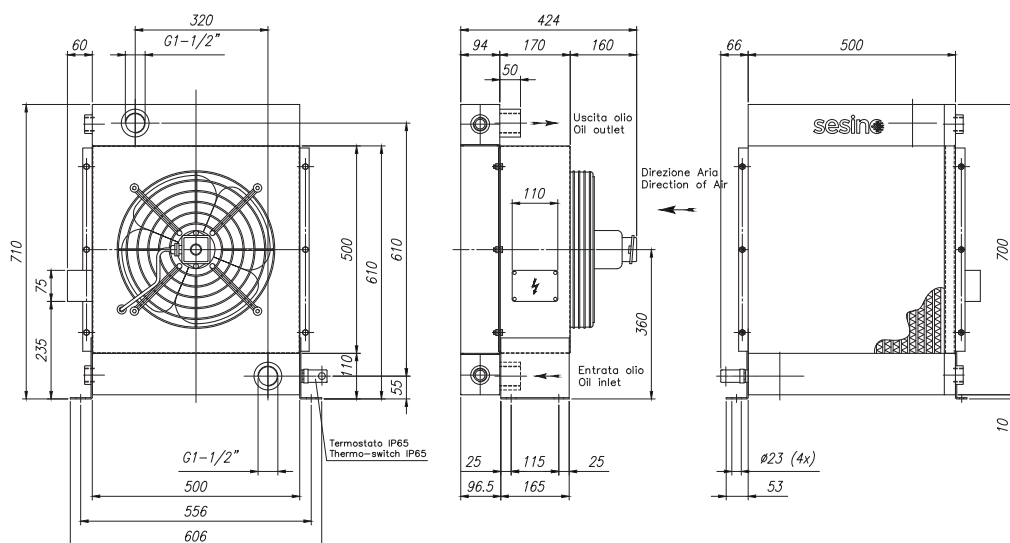

OIL FLOW	VOLTAGE	FREQUENCY	POWER	CURRENT	AIR FLOW	PROTECTION	NOISE LEVEL	WEIGHT	ø FAN
l/min	V	hz	W	A	m³/h	IP	dB(A)	kg	mm
50-300	Δ 230 Y 400	50	110/180	0,57/0,33	3.500	55	72	40	400
50-300	Δ 265 Y 460	60	145/260	0,68/0,39	4.800	55	72	40	400